














Conventional flue picking list

Sales order: _____

Customer: _____

Boiler Model: _____

PT. NO.	DESCRIPTION	IMAGE	QTY.	PACKED
FL100CF	CONVENTIONAL FLUE ADAPTOR KIT (required for all installations)		1	
PW20011	WHITE CASING TRIM PLATE (115MM HOLE)		1	Part of FL100CF kit
FL100X200	100MM O/D X 200 PIPE			
FL100X450	100MM O/D X 450 PIPE			
FL100X950	100MM O/D X 950 PIPE			
FL100XTEL	100MM O/D TELESCOPIC PIPE 80-400 RANGE (SEE NOTE BELOW)			
FL100-45ELB	100MM 45 DEG ELBOW			
FL100TP	100MM TOP PLATE (450MM SQUARE) <i>(required for flaunch chimney)</i>			
FL100SA	100MM SCREW FIT ADAPTOR (required for all installations)		1	
FL100TC	100MM TOP CLAMP <i>(required for flaunch chimney)</i>			
FL100TI	100MM TOP INSERT <i>(required for flaunch chimney)</i>			
FL100CC	100MM CHIMNEY POT COWL <i>(required for chimney pot terminations)</i>		COWL:	
			CLIP:	
FL100LIN	100MM TWIN WALL LINER PER METRE			

Note. The telescopic extension slides into the pipe below, this component is not load bearing

FLAUNCHED CHIMNEY STACK

Top insert.


(Protects the cut edge of the liner from rain ingress with a lip to allow for cement flaunching.)

Top clamp

(used in conjunction with the "top plate" to secure the liner at the top of the stack)

Top plate

(can be used as a closing plate above the appliance)

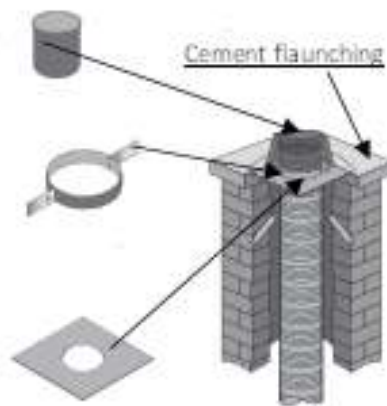

CHIMNEY POT

Chimney pot cowl

An integral cowl with screw-on fixing to liner, Secured to chimney with a and wrap round stainless steel band.

